



3216

THERMALLY-BROKEN INSULATED STEEL SANDWICH DOOR

08 36 13/CHI
Buyline 3132


www.chiohd.com

C.H.I. OVERHEAD DOORS

THE DOOR TO QUALITY.



NO PARKING

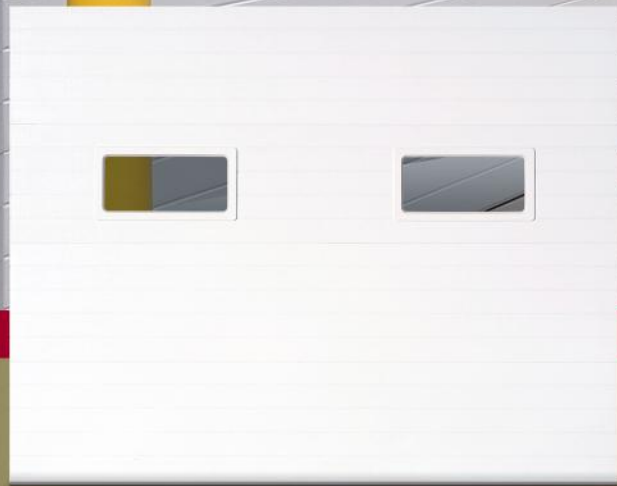

9' x 7' 3216 white with optional 24" x 12" windows.


This model also available in



DURABLE. THERMALLY-BROKEN.



SPECIFICATIONS, OPTIONAL FEATURES AND ACCESSORIES



END STILES
White painted end stiles are 4" or 8" wide to accommodate double or single-end hinges.







SPRINGS
Torsion springs are helically wound with stress relieved, oil-tempered wire



SECTION JOINT
Section joints are gasketed and thermally-broken for a tight weatherseal.

OPTIONAL WINDOW DESIGNS

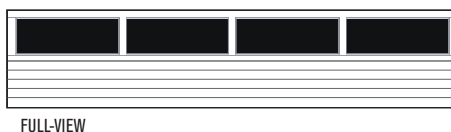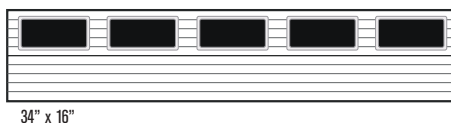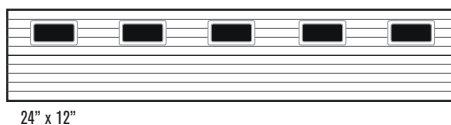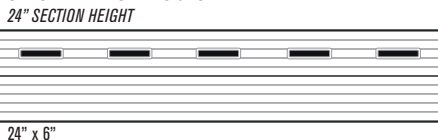

The Door to Quality.



COLOR SELECTION

Note: Refer to samples at your local C.H.I. distributor for exact color match.

26-GAUGE MODEL 3216, Thermally-Broken Insulated Steel Back

SECTIONS

- Sections are 2" thick
- Sections include a thermal break to eliminate thermal convection
- Outside skin features horizontal micro-grooves
- Concealed steel back-up plates run from top to bottom of each section for secure hardware attachment
- Bottom "U" type astragal is a standard feature

TRACKS

- Tracks are 2" or 3", as specified
- Available in bracket mount, angle mount, clip angle mount, 12" radius, 15" radius, high lift, vertical lift, roof pitch, or dual track low headroom

HARDWARE

- Package includes 14 gauge or 11 gauge hinges, as specified
- 2" or 3" short-stem or long-stem ball bearing rollers
- Heavy duty adjustable top roller brackets

SPRINGS

- Torsion springs are helically wound with stress relieved, oil-tempered wire
- Springs are individually calibrated per door
- Counter-balance torsion shafts are galvanized for rust resistance


INSULATION TYPE

- Foamed in place CFC free polyurethane core
- DASMA TDS-163 calculated R-value - 15.76*

FEATURES

VISIT YOUR DOOR PROFESSIONAL AT:

C.H.I. Overhead Doors are manufactured in Arthur, Illinois, USA.



This Model utilizes 26-gauge exterior and 27-gauge interior steel skins injected with CFC free urethane insulation. The thermally-broken tongue and groove section joint includes a continuous weather seal offering exceptional protection from the elements.

Model 3216R-value - 15.76*

FLIER NUMBER_M3216-0408R3

*Calculated door section R-value is in accordance with DASMA TDS-163.

All information presented is based on the specifications and features available at the time of printing and is subject to change without notice.